

Spraying nozzles Type A


Square cone nozzle, for systems of refrigeration, cleaning and water curtain

Usage: in the process of washing, turning off and re-refrigeration. Washing and refrigeration of gas, protection against fire and dust control.

For the request of **adapted products**, the following specifications are needed:

- Material
- Pulverization angle
- Kind of nozzle
- Ring
- Flow (l/min or l/h)
- Work pressure

The nominal flow is pulverizing water in normal conditions in an aerial way.

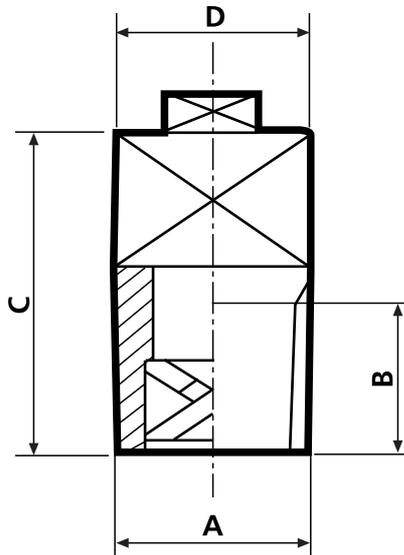

Measures in mm

A	B	C	D
1/4 GAS	10	23	14
3/8 GAS	11	30	17
1/2 GAS	12	30	21

Material: Brass

Reference	Angle	Ring	Flow (l/min)		
			1 bar	3 bar	5 bar
A 3	100°	1/4 GAS	6,20	10,10	12,70
A 3,5	100°	1/8 GAS	7,60	12,30	15,4
A 4	110°	3/8 GAS	8,90	14,50	18,00
A 4,5	110°	1/2 GAS	10,70	17,30	21,90
A 5	105°	1/2 GAS	15,60	24,90	31,50
A 7	105°	1/2 GAS	20,10	33,00	41,00